




GDR15API

SLOTTED GRATING STAINLESS STEEL- CLASS A15

FUNCTION :

- Enables the drainage of runoff waters. Complies with the NF EN 1433 standard and the CE marking. Can be installed in areas defined in the Group 1 Load Class A15 (pedestrians and cyclists)
- This grating model respects the requirements for accessibility for people with reduced mobility 




DESCRIPTION :


- This grating class A15 is in stainless steel

TECHNICAL CHARACTERISTICS :

- Resistance class : A15 (EN 1433)
- Width : 199 mm
- Length : 1000 mm
- Overall height : 20 mm
- Captation surface : 435 cm² / ml
- Slot dimensions : 9 / 130 mm
- Weight : 2.3 kg



Side view

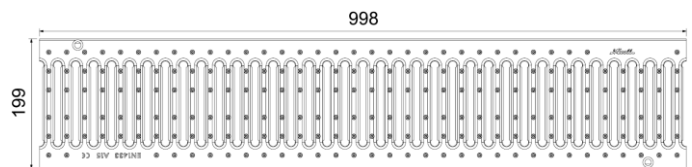

Top view

ACCESSORIES :

- The grating can be installed with Connecto channels :
 - High channel body - width 150 : CAN188N
- To fix grating on channel, it's necessary to use two FIXCAN3 (self-tapping screw)



CAN188N

IMPLEMENTATION :

1. See the installation scheme opposite with the channel CAN188N
2. The grating must be set back 3 to 5 mm from the finished level

