
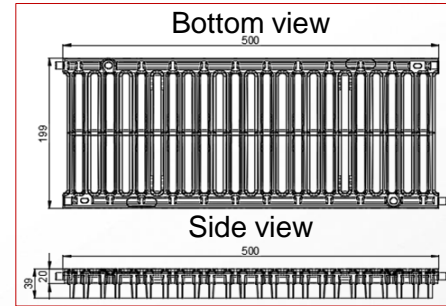
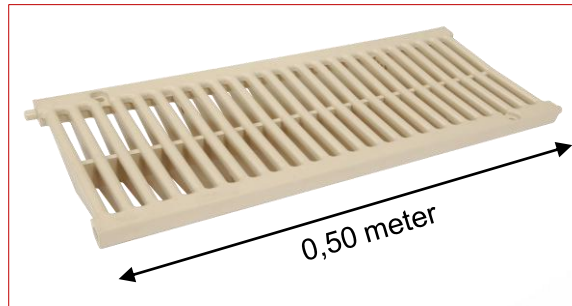


Connecto® I PVC grating – sand colour - class A15

Code : GRL88S

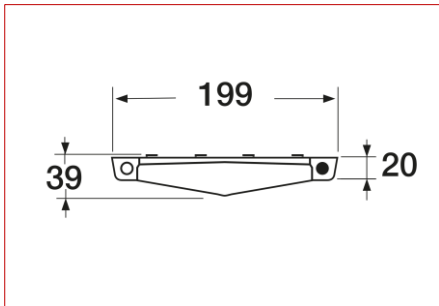

■ FUNCTION :

The grating is designed to drain run-off water. In accordance with EN1433 standard and the marking **CE**, it can be used in private areas for all building applications, the environment of home, parks and gardens in class **A15**.

■ DESCRIPTION :

This grating class A15 is injected in sand PVC with anti-UV treatment.



■ ACCESSORIES :

This grating can be installed with one type of drainage channel :


- Channel body Connecto length 1m width 200 in PP with PP edges – light grey : CAN188

To fix a grating, it's necessary to use two FIXCAN2 (set made up of 1 screw covered with zinc and 1 insert of zamak bichromate).



■ CHARACTERISTICS :

- Resistance class: A15
- Width: 199 mm
- Length: 500 mm
- Overall height: 39 mm
- Grating type: PVC
- Drainage surface: 604 cm²/ml
- Opening dimensions: 10 / 157 mm
- Weight: 1.3 kg

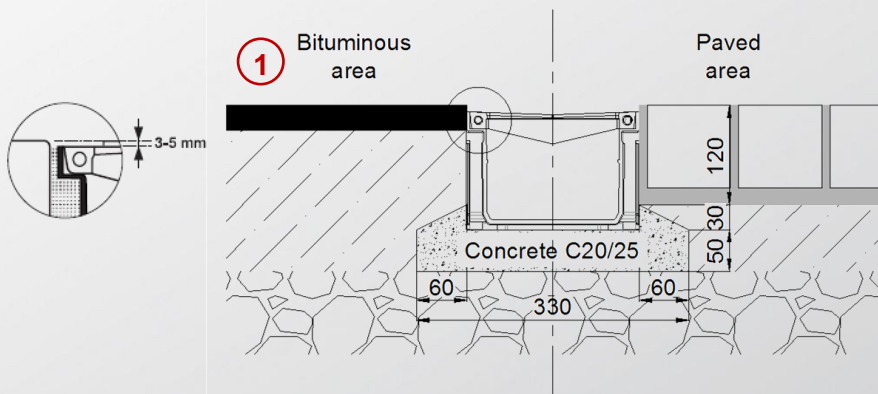

■ IMPLEMENTATION :

1. See the installation scheme opposite with the channel CAN188.
2. If you don't use Connecto channel, please leave a space between gratings to allow a free expansion.

■ QUALITY - ENVIRONMENT :



DATE : July 2015